

QUIMIBERICA, S.A.

SAE 10W40 UHPD



BROOK'S

TECHNICAL INFORMATION

DESCRIPTION AND APPLICATION

Synthetic lubricant recommended for turbocharged diesel engines in long-haul commercial vehicles (TIR) with extraordinarily long oil change intervals. Designed for Euro V low-emission diesel engines and Scania Euro VI engines.

PROPERTIES

- It has detergent, dispersant and anti-wear properties that keep the most sensitive parts of the engine clean.
- It offers excellent thermal stability.
- Its anti-oxidant and anti-corrosive power allows for extended drain intervals.
- FUEL ECONOMY technology.

TYPE ANALYSIS

PARAMETERS	UNITS	VALUE
Density at 15°C	g/cm ³	0,851
Viscosity at 100°C	cSt	12,5-16,3
Viscosity index	-	152
Flash point	°C	220
Pour point	°C	-36

The characteristics mentioned represent typical values.

SPECIFICATIONS

ACEA E7/E4	RENAULT RLD-2
API CI-4	VOLVO VDS-3
MAN M 3277	MACK EO-N
MB 228.5	CUMMINS CES 20078/77
SCANIA LDF-3	DEUTZ DQC III-10
MTU Type 2	JASO DH-1
DETROIT DIESEL DCC 93K215	


STORAGE CONDITIONS AND EXPIRATION

The product does not require special storage measures.

As general storage conditions, heat sources, radiation, electricity and contact with food should be avoided.

Store closed containers between 5 and 35°C, in a dry and well-ventilated place.

Best before date: 2 years.

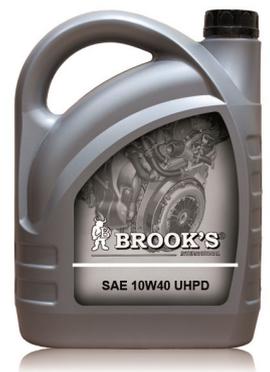

PACKAGING

5 L
20 L
200 L
1.000 L

Edition 7 Date: 30/10/2024

Página 1

This information is given as a guide and does not imply contractual liability. The technical data are average values and are subject to the usual fluctuations in production, and do not constitute a product specification. Before using the product, it is recommended to read the information contained on the packaging. Quimiberica S.A. products are covered by a legal guarantee (Guarantee Law) against lack of conformity under the provisions of the General Law for the Defence of Consumers and Users (Royal Legislative Decree 21/2007) provided that the storage conditions specified in this technical data sheet are met. This technical data sheet specifies the duration of said product guarantee.